


JAP6

72/295-320/3BB

MULTICRYSTALLINE SILICON MODULE

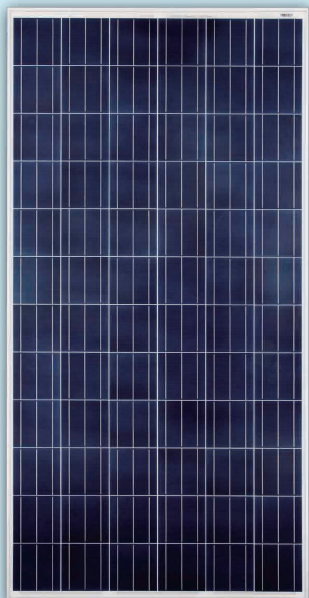

JA Solar Holdings Co., Ltd.

JA Solar Holdings Co., Ltd. is a world-leading manufacturer of high-performance photovoltaic products that convert sunlight into electricity for residential, commercial, and utility-scale power generation. The company was founded on May 18, 2005, and was publicly listed on NASDAQ on February 7, 2007. JA Solar is one of the world's largest producers of solar cells and modules. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry.

Address: NO.36, Jiang Chang San Road, Zhabei, Shanghai 200436, China


TEL: +86 21 6095 5888 / +86 21 6095 5999

Fax: +86 21 6095 5858 / +86 21 6095 5959

Email: sales@jasolar.com market@jasolar.com

Superior Warranty

- 10-year product warranty
- 25-year linear power output warranty

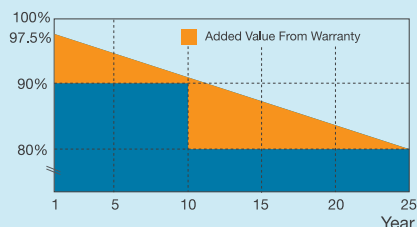

Key Features



Multicrystalline modules designed for commercial and solar farm grid-tied applications



High output, 16.25% highest conversion efficiency



Designed for UL DC 1000V applications



Anti-reflective and anti-soiling surface reduces power loss from dirt and dust



Outstanding performance in low-light irradiance environments



Excellent dynamic and static mechanical load resistance: Certified to withstand high wind loads (2400Pa) snow loads (5400Pa) and dynamic loads (1440Pa/10000 cycles)



High salt and ammonia resistance certified by TÜV NORD

Reliable Quality

- Positive power tolerance: 0~+5W
- 100% EL double-inspection ensures modules are defects free
- Modules binned by current to improve system performance
- Potential Induced Degradation (PID) Resistant



Comprehensive Certificates

- IEC 61215, IEC 61730, UL1703, CEC Listed, MCS and CE
- ISO 9001: 2008: Quality management systems
- ISO 14001: 2004: Environmental management systems
- BS OHSAS 18001: 2007: Occupational health and safety management systems
- Environmental policy: The first solar company in China to complete Intertek's carbon footprint evaluation program and receive green leaf mark verification for our products



Specifications subject to technical changes and tests. JA Solar reserves the right of final interpretation.

Engineering Drawings

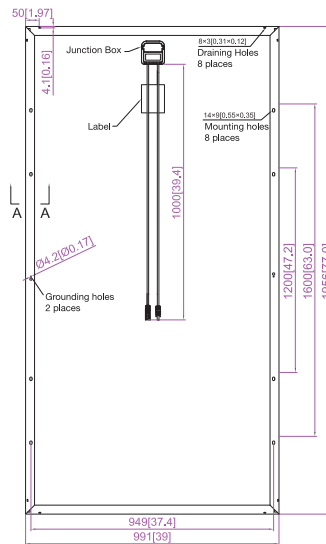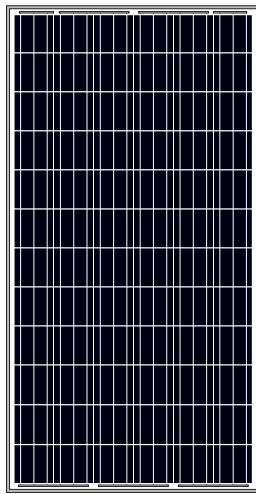

■ customized mounting hole available upon request

MECHANICAL PARAMETERS

Cell (mm)	Poly 156x156
Weight (kg)	23 (approx)
Dimensions (LxWxH) (mm)	1956x991x45
Glass Thickness(mm)	4
No. of Cells and Connections	72 (6x12)
Junction Box / Cable Cross Section Size (mm ²)	IP67, 3 diodes/4
Connector	MC4 Compatible
Packaging Configuration	23 Per Pallet




WORKING CONDITIONS

Maximum System Voltage	DC 1000V (UL)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	15A
Maximum Static Load, Front (e.g., snow and wind)	5400Pa (112 lb/ft ²)
Maximum Static Load, Back (e.g., wind)	2400Pa (50 lb/ft ²)
NOCT	45±2°C
Application Class	Class A

ELECTRICAL PARAMETERS

TYPE	JAP6 72-295/3BB	JAP6 72-300/3BB	JAP6 72-305/3BB	JAP6 72-310/3BB	JAP6 72-315/3BB	JAP6 72-320/3BB
Rated Maximum Power at STC (W)	295	300	305	310	315	320
Open Circuit Voltage (Voc/V)	45.00	45.20	45.35	45.45	45.60	45.82
Maximum Power Voltage (Vmp/V)	36.25	36.41	36.71	37.00	37.28	37.56
Short Circuit Current (Isc/A)	8.65	8.73	8.79	8.85	8.91	9.03
Maximum Power Current (Imp/A)	8.14	8.24	8.31	8.38	8.45	8.52
Module Efficiency [%]	15.22	15.48	15.73	15.99	16.25	16.51
Power Tolerance (W)	-0 ~ +5W					
Temperature Coefficient of Isc (αIsc)	+0.058%/°C					
Temperature Coefficient of Voc (βVoc)	-0.330%/°C					
Temperature Coefficient of Pmax (γPmp)	-0.430%/°C					
STC	Irradiance 1000W/m ² , Module Temperature 25°C, Air Mass 1.5					

I-V CURVE



NOCT

TYPE	JAP6 72-295/3BB	JAP6 72-300/3BB	JAP6 72-305/3BB	JAP6 72-310/3BB	JAP6 72-315/3BB	JAP6 72-320/3BB
Max Power (Pmax) [W]	214.17	217.80	221.43	225.06	228.69	232.32
Open Circuit Voltage (Voc) [V]	42.14	42.31	42.47	42.58	42.63	42.78
Max Power Voltage (Vmp) [V]	33.57	33.77	33.91	34.05	34.08	34.28
Short Circuit Current (Isc) [A]	6.84	6.89	6.93	6.99	7.06	7.16
Max Power Current (Imp) [A]	6.38	6.45	6.53	6.61	6.71	6.78
Condition	Under Normal Operating Cell Temperature, Irradiance of 800 W/m ² , spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s					

Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.